


REFER ALLCO BACKFILL AND PROTECTION DOCUMENTS FOR BACKFILL REQUIREMENTS

REFER BALANCE OF ALLCO DRAWINGS FOR MEMBRANE SYSTEM DETAILS

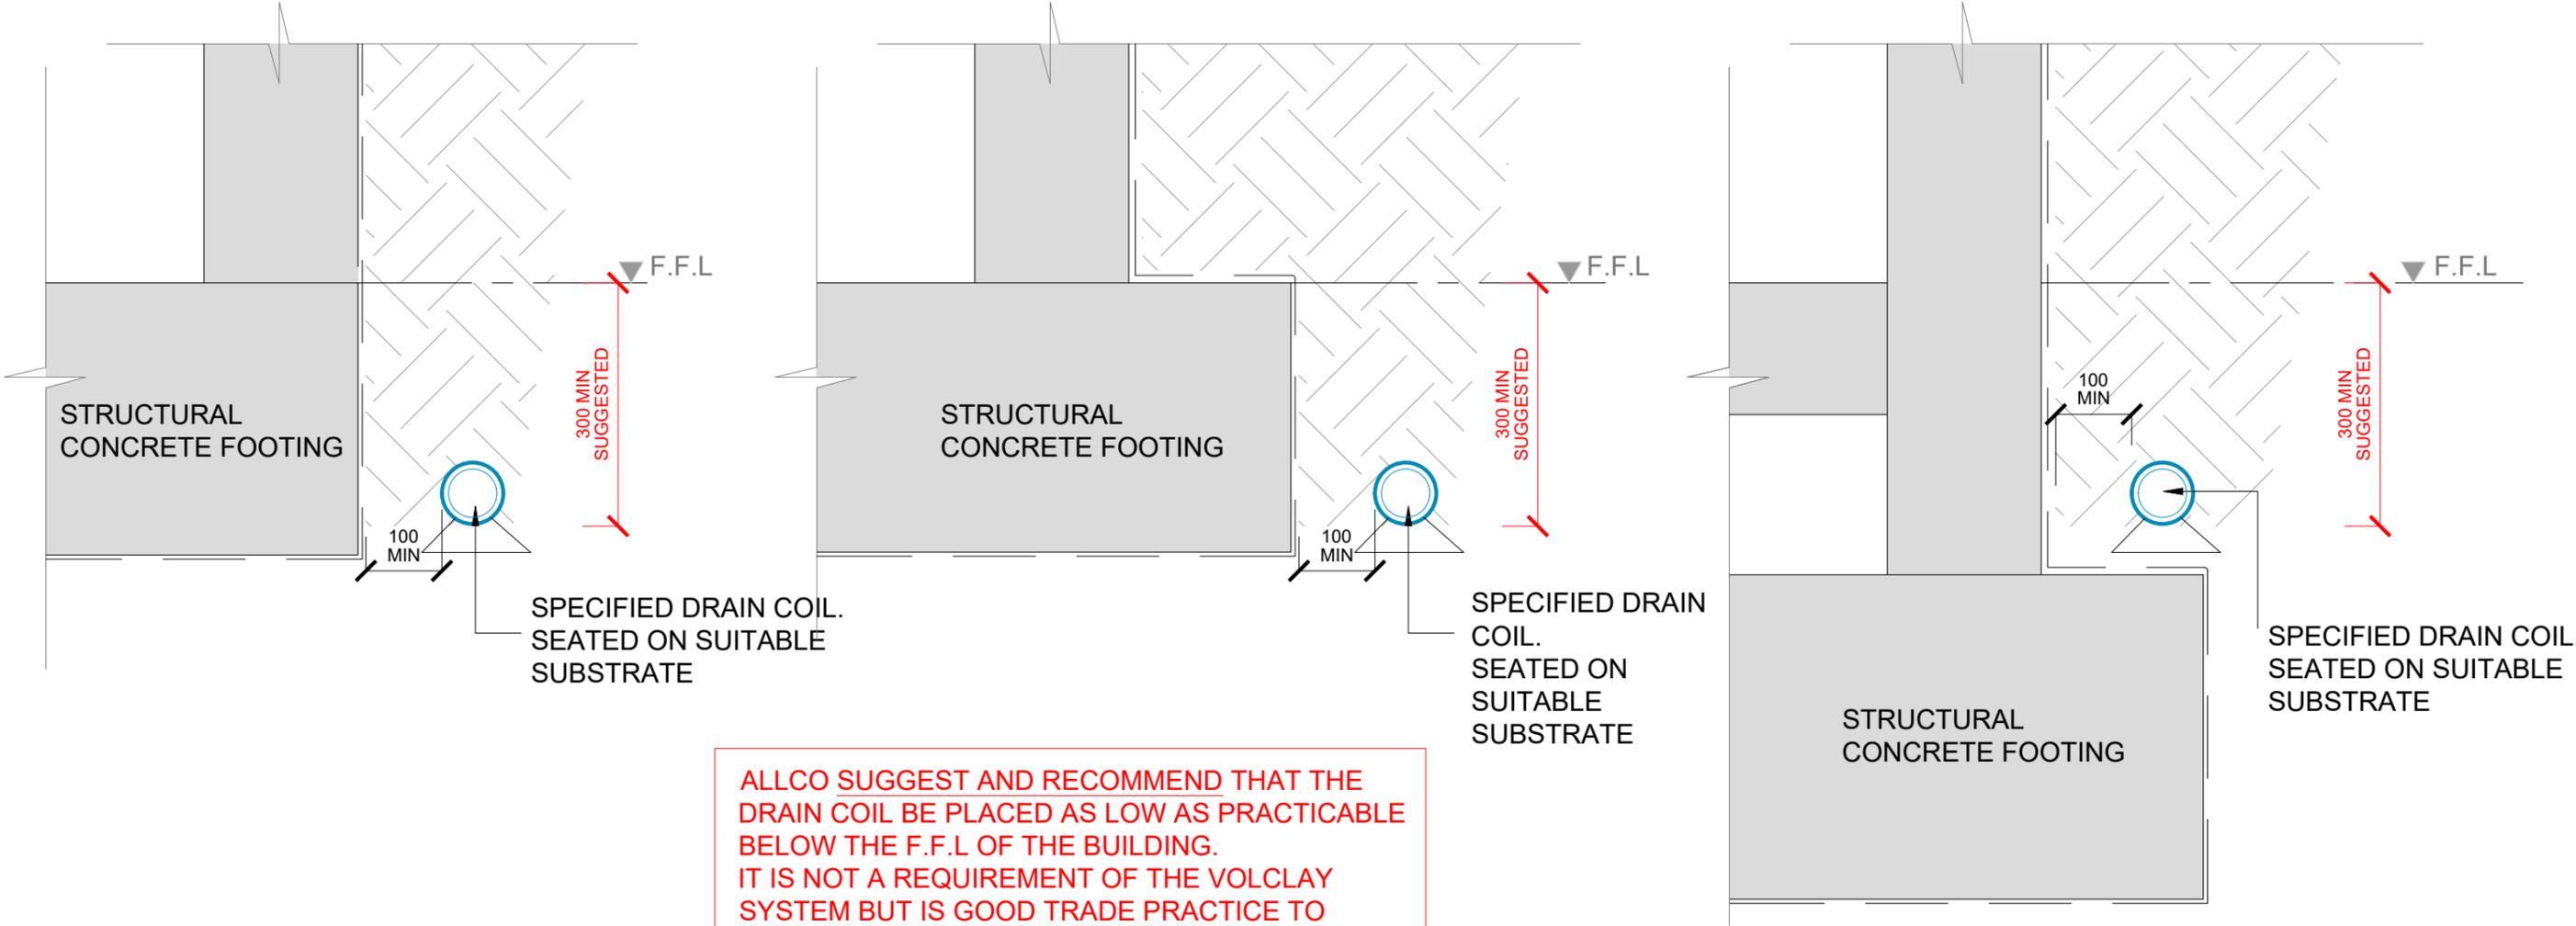

ALLCO SUGGEST AND RECOMMEND THAT THE DRAIN COIL BE PLACED AS LOW AS PRACTICABLE BELOW THE F.F.L OF THE BUILDING. IT IS NOT A REQUIREMENT OF THE VOLCLAY SYSTEM BUT IS GOOD TRADE PRACTICE TO ACHIEVE 200-300MM IF PRACTICABLE.

**1** DRAIN COIL - ACCEPTABLE LOCATIONS  
SCALE: NTS



The information and data contained herein are believed to be accurate and reliable. This information does not constitute a warranty and should be used in conjunction with the project specification document supplied by Allco Waterproofing Solutions Ltd. Please contact Allco Waterproofing Solutions Ltd with any questions or deviations from this information.  
© Allco Waterproofing Solution Ltd

For Technical Advice Contact:  
Web: [www.allco.co.nz](http://www.allco.co.nz)  
Email: [info@allco.co.nz](mailto:info@allco.co.nz)  
Telephone: 09 448 1185  
Facsimile: 09 448 1186



DRAWN BY:  
ALLCO

DATE:  
05/19

DRAWING REF:  
V-F-06

REV:  
3