


REFER ALLCO TYPICAL DETAILS
FOR VARIATION ON BALANCE
FOR WATERPROOFING

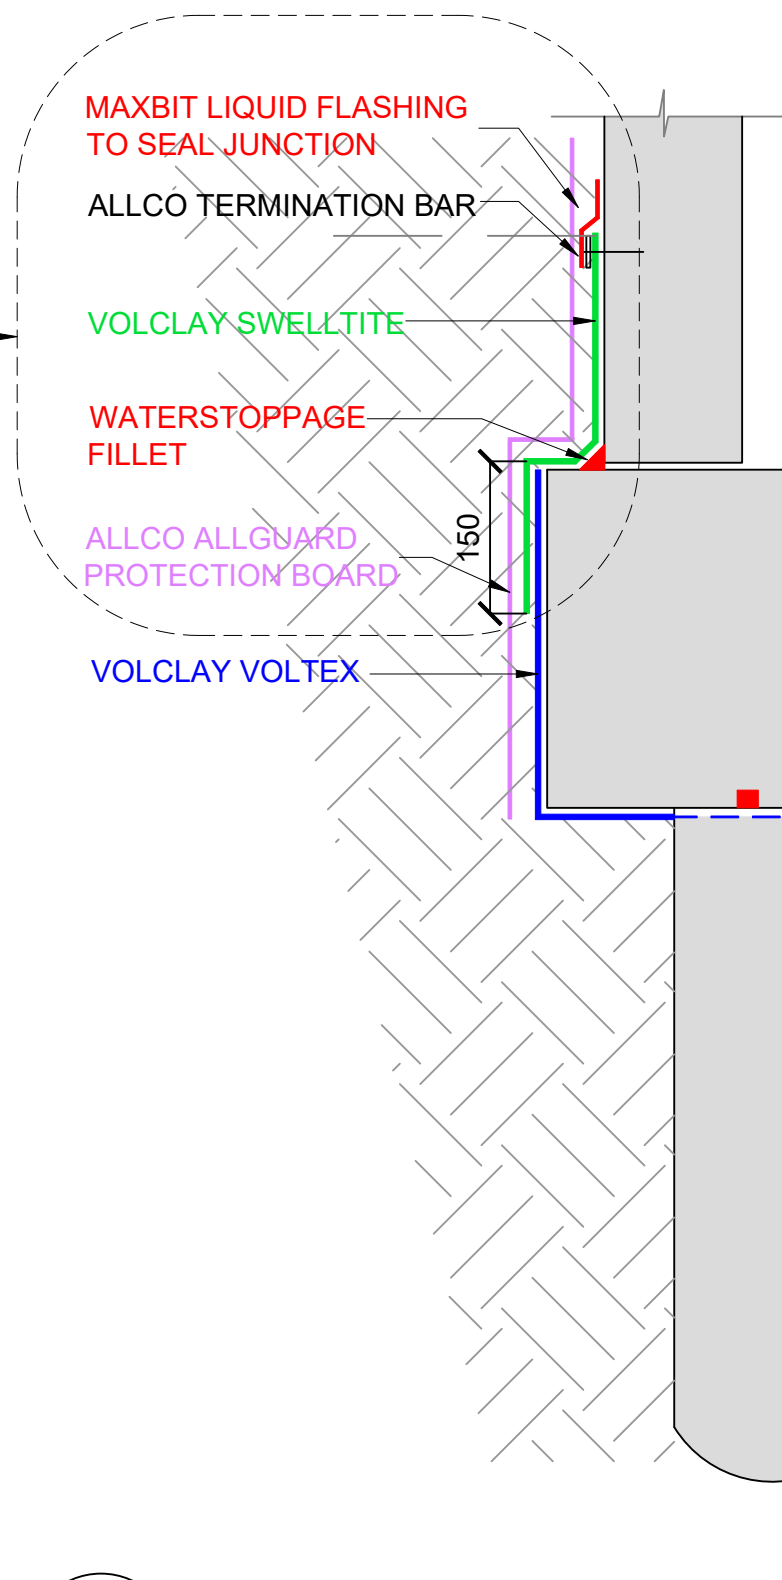

STRUCTURAL CONCRETE CAPPING
AND PILE. REFER ENGINEERS
DESIGN & DOCUMENTATION.

WATERSTOP RX101T.
AROUND PILE CAP.
75MM MIN. CONCRETE
COVER


WATERSTOP RX101T
ALONG BEAM / WALL
JUNCTION

AQUADRAIN 15x

VOLCLAY VOLTEX

SHOTCRETE WALL (100MM MIN THICKNESS)

50MM UNREINFORCED
SHOTCRETE (FLASH COAT)



FOUNDATION DETAIL - PILE CAP / SHOTCRETE WALL

SCALE: NTS



The information and data contained herein are believed to be accurate and reliable.
This information does not constitute a warranty and should be used in conjunction with the
project specification document supplied by Allco Waterproofing Solutions Ltd
Please contact Allco Waterproofing Solutions Ltd with any questions or deviations from
this information.
© Allco Waterproofing Solution Ltd

For Technical Advice Contact:
Web: www.allco.co.nz
Email: info@allco.co.nz
Telephone: 09 448 1185
Facsimile: 09 448 1186



DRAWN BY:
ALLCO

DATE:
02/24

DRAWING REF:
V-F-04A

REV:
3